




# TR3080

Toroidal audio line transformer 80W 100V

### Product information:

The TR3xxx offers a range of line transformers with a power ranging from 30 Watt up to 480 Watt. There are different tapings available for 50V, 70V and 100V lines and the low impedance side is selectable between 2 Ohm, 4 Ohm and 8 Ohm. All these tranformers are designed to be mounted on the TR3000 installation plate and are supplied with all necessary accessories for mounting.

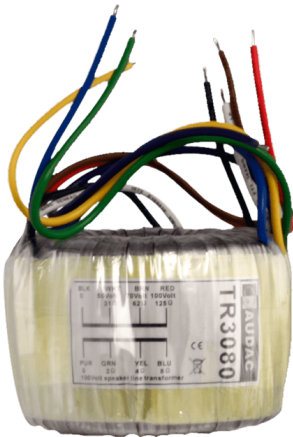

### System specifications:

Program power handling	80 W
Connectors	7.87 " cable

### Product Features:

Dimensions	3.54 x 2.56 x 3.54 " (W x H x D)
Weight	3.53 lb
Construction	Copper